



DSD565.U

Integrated dishwasher

General description

Product line: Logic
Mode of installation: Panel Ready
Size: ADA height compliant
Number of baskets: 3
Number of place settings: 16 place settings
Upper basket type: Exclusive
Lower basket type: Exclusive
Removable cutlery basket for easy unloading



Construction

- Welded stainless steel container
- Exterior float - detects water leakage on the base
- Stand by water protection
- Anti-block drain pump
- 8 Steel™ Construction
- Hidden heater
- SCS+ - Super Cleaning System+™
- Sensi Clean™ Sensor - measures dirtiness level
- Number of spray arms: 3
- Number of spray zones: 9
- Automatic door opening
- Cutlery Power Zone - extra dishwashing power for the cutlery basket



Use and flexibility

- Number of place settings: 16 place settings
- Number of baskets: 3
- Upper basket type: Exclusive
- Upper basket system: Easy height adjustable with lever
- Guide rails with ball bearings for upper basket
- China Guard - protects fragile load from the rotating spray arm
- Lower basket type: Exclusive
- Vase and bottle holder
- Tight mesh base in the baskets
- Removable cutlery basket for easy unloading
- 2 interior LED lights
- Required inlet water pressure: 0,03-1 MPa

Interaction & control

- Display Type: LCD display
- Ability to create own programs: Memory program
- Number of programs: 8
- Number of options: 7
- Status Light™
- Time remaining indicator: Yes
- Cycle end indication: Displayed with sound and light
- Adaptable power zones
- Adaptable water pressure

Programs

- 8 programmes: Normal wash; Automatic program; Intensive program; Time program; Rinse and hold; Quick Pro wash; Self-cleaning; Sanitize
- Delayed start: 1-24 hours
- Green mode
- Speed mode
- Night mode
- Heat boost mode
- Normal mode

Design & integration

- From front adjustable door spring
 - From front adjustable rear foot
 - Velcro strips
 - Trim kit
 - Multi fit outlet hose
 - Simplified installation with integrated anti-siphon
 - Depth (incl. wall spacing): 21 7/8" (555 mm)
 - Height setting: 2 1/16" (53 mm)
-

Safety & Maintenance

- Aqua Safe™
 - Kid Safe™ - lockable controls
 - Rinse-aid indication: Notification in display
-

Technical data

- Hot or cold water connection - 9/16
 - Max. temperature of inflow water: 140 F
 - Noise level: 40 dB(A)
 - Duration of normal wash cycle: 125 min
 - Estimated annual energy consumption: 220 kWh
 - Energy consumption/cycle: 1 kWh
 - Estimated annual water consumption: 647 US Gal
 - Water consumption/cycle: 3 US Gal
 - Consumption in standby mode: 0.5 W
 - Connection rating: 1300 W
 - Number of phases: 1
 - Current: 15 A
 - Frequency: 60 Hz
 - Required inlet water pressure: 0,03-1 MPa
 - Net weight: 90 lbs
-


Dimensions

- Width: 23 15/16" (608 mm)
 - Height: 32 1/4" (819 mm)
 - Depth: 21 13/16" (554 mm)
 - Maximum product height: 34 5/16" (872 mm)
 - Cord length: 71 7/16" (1815 mm)
 - Depth with door open: 48 15/16" (1243 mm)
 - Length of inflow hose: 64 3/16" (1630 mm)
 - Length of outflow hose: 90 9/16" (2300 mm)
-

Logistic information

- Packaging width: 25 3/16" (640 mm)
 - Packaging height: 35 1/16" (890 mm)
 - Packaging depth: 26 3/4" (680 mm)
 - Total weight of packaged product: 97 lbs
 - Code: 740098
 - EAN code: 3838782650666
 - Market: Domestic
 - Range: Logic
-

Measurements: inches / millimetres

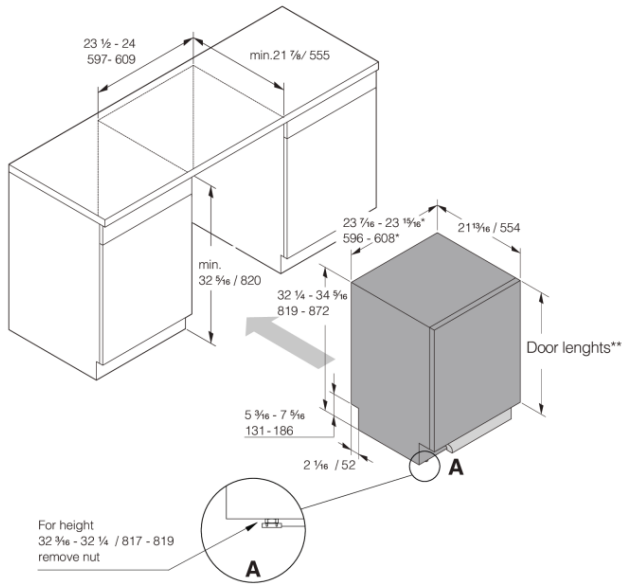

* Flexible side trims (width without side trims: $23 \frac{7}{8}$ / 596)

**** Door lengths:**

- Fixed door: $26 \frac{3}{4} - 29 \frac{1}{8}$ / 680 - 760
- Sliding door: $27 \frac{3}{8} - 31 \frac{1}{2}$ / 700 - 800
- Sliding door with Status Light: $28 \frac{3}{8} - 31 \frac{1}{2}$ / 720 - 800

DW60 Sliding door dishwasher XL USA

