

Volta


Induction cooktop

Specification sheet



Learn more

MEASUREMENTS

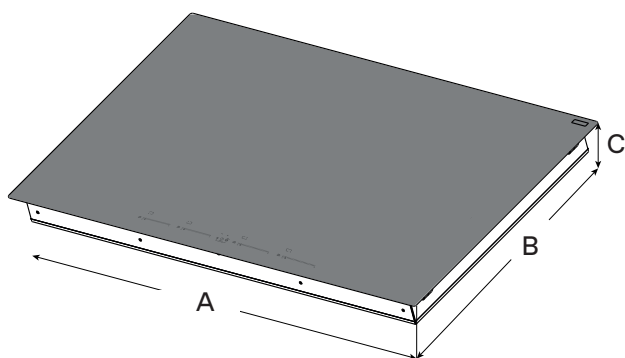

| | EIV424BL | EIV430BL | EIV536BL |
|---|-------------------|--------------------|--------------------|
| A | 24" (61 cm) | 30" (76 cm) | 36" (91.54 cm) |
| B | 20 3/4" (52.7 cm) | 22 3/16" (56.4 cm) | 22 3/16" (56.4 cm) |
| C | | 2 1/2" (6.2 cm) | |

VOLTA 24"



VOLTA 30"



VOLTA 36"



DESCRIPTION

Introducing Volta, a line of powerful cooktops equipped with top-end induction technology, ensuring precise and efficient cooking like never before.

The modern design showcases a luxurious black glass surface and electronic side touch controls, allowing it to seamlessly blend style and functionality. Available in three convenient widths - 24", 30", and 36" - Volta offers a range of options to fit any kitchen space. Additionally, our cooktops come with multiple plus features that will revolutionize your cooking experience.








FEATURES

- Timer
- Temperature manager
- Child lock
- Bridge zones
- Pot self-detection
- Total integration
- Extralarge zone
- Touch controls
- Stop and go
- Delay switch off



GENERAL PROPERTIES

| Width | 24" | | 30" | | 36" | |
|---|---|-----------|--------------------------------|------------|---------------------------------|------------|
| Model | EIV424BL | | EIV430BL | | EIV536BL | |
| Dimensions | 24 3/4"W x 20 3/4"D x 2 1/2"H | | 30 3/8"W x 22 3/16"D x 2 1/2"H | | 36 3/16"W x 22 3/16"D x 2 1/2"H | |
| Electrical | 220V-60Hz, 10.8Kw, 32A | | 220V-60Hz, 13.3Kw, 32A | | 220V-60Hz, 17Kw, 32A | |
| Cooking zones | 4 cooking Zones | | 4 Cooking Zones | | 5 Cooking Zones | |
| <ul style="list-style-type: none">  Burner 1  Burner 2  Burner 3  Burner 4  Burner 5 | 3kW | Ø 7 1/2" | 3.7 kW | Ø 7 1/4" | 3.7 kW | Ø 7 1/4" |
| | 3kW | Ø 7 1/2" | 3.7 kW | Ø 7 1/4" | 3.7 kW | Ø 7 1/4" |
| | 3kW | Ø 10 7/8" | 2.2 kW | Ø 6 7/8" | 2.2 kW | Ø 6 7/8" |
| | 1.8kW | Ø 6 5/16" | 3.7 kW | Ø 11 7/16" | 3.7 kW | Ø 9 7/16" |
| | | | | | 3.7 kW | Ø 11 7/16" |
| Controls | Electronic glass touch & slide w/red illumination | | | | | |
| Finish | Tempered, ultra deep black ceramic glass | | | | | |
| Installation type | Built-in or self rimming/flush | | | | | |
| Heating type | Induction | | | | | |
| Heating level | 10 levels (9 + boost, see details in chart below) | | | | | |


WARRANTY: ² **Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**

| Cooking level | Power (W) |
|---------------|-----------|
| Level 1 | 63 W |
| Level 2 | 105 W |
| Level 3 | 168 W |
| Level 4 | 252 W |
| Level 5 | 378 W |
| Level 6 | 588 W |
| Level 7 | 882 W |
| Level 8 | 1344 W |
| Level 9 | 2100 W |
| Booster | 3700 W |

Glass specifications


| | |
|-----------------------|---|
| Material | Glass ceramic cooking panel |
| Appearance | Deep-black color |
| Thickness | 4 mm |
| Color in reflexion | Black |
| Color in transmission | Amber |
| Surface structure | Though crystal smooth scratch & stain-resistant |

SELF RIMMING INSTALLATION

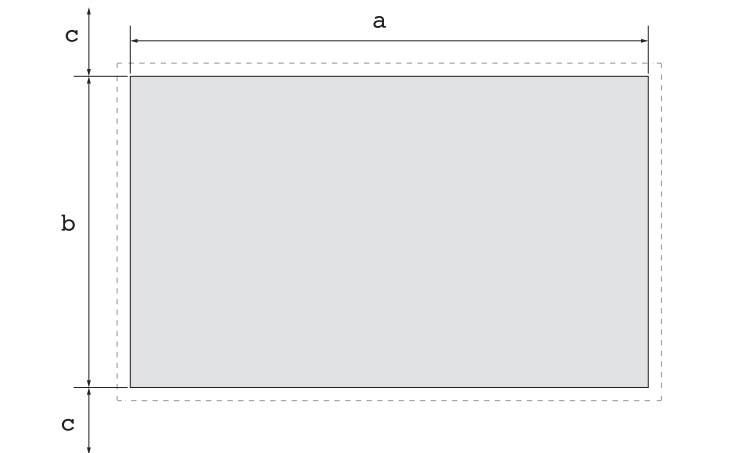

| | EIV424BL | EIV430BL | EIV536BL |
|---|--------------------|--------------------|--------------------|
| a | 23 1/8" (58.7 cm) | 28 7/8" (73.34 cm) | 34 9/16" (87.7 cm) |
| b | 19 1/2" (49.5 cm) | 20 1/2" (52.07cm) | |
| c | 1 5/16" (5 cm) min | | |

FLUSH MOUNTED INSTALLATION

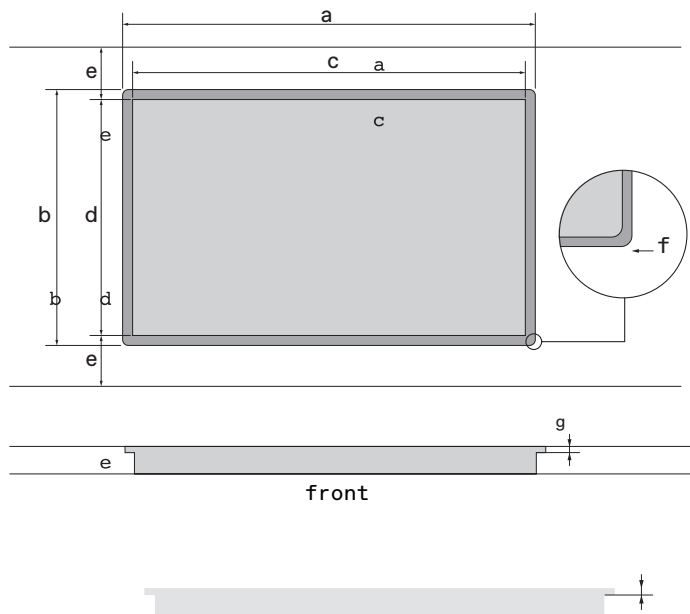

| | EIV424BL | EIV430BL | EIV536BL |
|---|--------------------|---------------------|--------------------|
| a | 24 1/4" (61.6 cm) | 30 7/16" (77.35 cm) | 36 1/8" (91.8 cm) |
| b | 20 13/16" (53 cm) | 22 5/16" (56.7 cm) | |
| c | 23 1/8" (58.7 cm) | 28 7/8" (73.3 cm) | 34 9/16" (87.7 cm) |
| d | 19 1/2" (49.5 cm) | 20 1/2" (52.07 cm) | |
| e | 1 5/16" (5 cm) min | | |
| f | 4" X Ø 7" min | | |
| g | 1/4" (0.65 cm) min | | |



The product images shown are for illustration purposes only and may not be an exact representation of the product.

¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.