

**Version** FISAB22B3SS-1 / Built-in 22" (55 cm) - 280 CFM  
**Collection** Built-in

**FEATURES AND PROPERTIES**

**Materials/Finishes** Scotch brite stainless steel  
**Control** Slider  
**Ducting type** Extracting/Filtering  
**Installation type** Insert  
**Lighting** Led 2x1,2 W - 3200 K  
**Filters** Metallic grease filter, removable and washable  
 Charcoal filter (optional)

**Ducting type**  
**Dimensions** 22 in  
**Minimum Electric hob distance** 21 in  
**Minimum Gas hob distance** 25 in  
**Notes** Cut-out size 10 5/16" (262) x 19 5/16" (506);  
 Recommended mounting height from cooking surface to hood bottom: 24" - 36"

**ELECTRICAL CONNECTION AND CONSUMPTION**

**Maximum consumption** 150 W  
**Voltage/Frequency** 110-120V 60Hz  
**Connection type** Hood comes standard with Nema 5-15P power cord

**BLOWER PERFORMANCE**


**Motor** 280 CFM  
**Minimum sound level**  
**Maximum sound level** 49 dB (A)re1pW I.E.C. 60704-2-13

**WEIGHTS AND DIMENSIONS**

**Gross weight** 20 lbs  
**Net weight** 14 lbs  
**Volume** 4 ft  
**Packaging dimensions** L 26 x H 15 x D16 in



Photograph is for information purposes only. May not correspond to the selected version

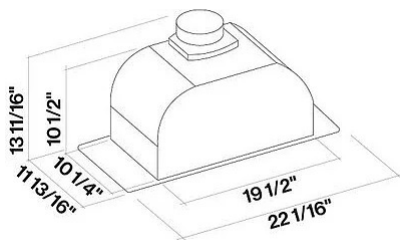

## **OPTIONAL ACCESSORIES**

<i>Code</i>	<i>Description</i>
KACL.815	Protective cleaning cloths for stainless steel (box 10 pcs)
103050102	FFCHAR2C0BL - Round charcoal filter Ø212 mm - Type 2

## ENGINE SPECIFICATIONS

Motor speed

Noise dB(A) re1pW I.E.C. 60704-2-13

Capacity

Maximum pressure (Pa)

Motor power (W)

Air outlet

## CAPACITY / PRESSURE

TECNICAL SPECS OF COOKERHOOD WITH 450 M3/H (280 CFM) MOTOR

Motor Speed	1	2	3
Noise dB(A) re 1pW - I.E.C. 60704-2-13	41	51	60
Noise (sones) re 1pW - I.E.C. 60704-2-14	2,46	4,93	9,2
Capacity m3/h Normalized piping IEC 61591	141	202	317
Capacity CFM Normalized piping IEC 61591	83	119	186
Capacity m3/h at 0 Pa	144	208	327
Capacity CFM at 0 Pa	85	122	192
Pressure max (Pa)	90	180	370
Motor power (W)	45	60	125
Air outlet	120	120	120