



# DIMENSIONS

## MICROWAVE OVEN PRODUCT DIMENSIONS


MODEL #	WML35011K	
Unit of Measurement	in	cm
Overall Width (A)	30	76
Overall Height (B)	10 <sup>5</sup> / <sub>16</sub>	26.2
Height of the door (C)	10 <sup>5</sup> / <sub>16</sub>	26.2
Depth without door (D)	17	43
Depth with door (E)	18 <sup>7</sup> / <sub>16</sub>	46.9
Depth with door open 90° (F)	43	109
Depth with Bump Out Kit (G)	19 <sup>7</sup> / <sub>16</sub>	49.4

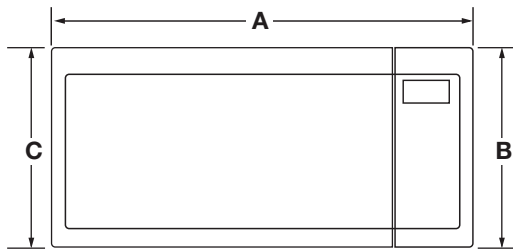

FRONT VIEW

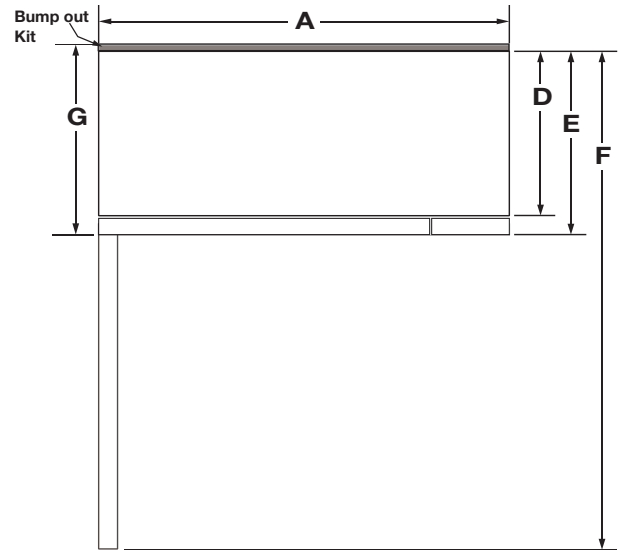

TOP VIEW

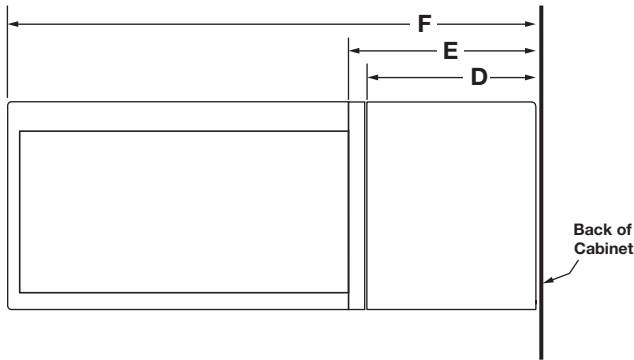

SIDE VIEW


**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.




# DIMENSIONS

## MICROWAVE INTERIOR CAVITY DIMENSIONS

MODEL #	WML35011K	
Unit of Measurement	in	cm
Cavity Height (J)	7	17.7
Cavity Height Including Highest Point of the Turntable (K)	6 <sup>7</sup> / <sub>8</sub>	17.5
Cavity Width (L)	18 <sup>7</sup> / <sub>8</sub>	48
Cavity Depth (M)	14	35.6
Turntable Diameter (N)	12	30.5

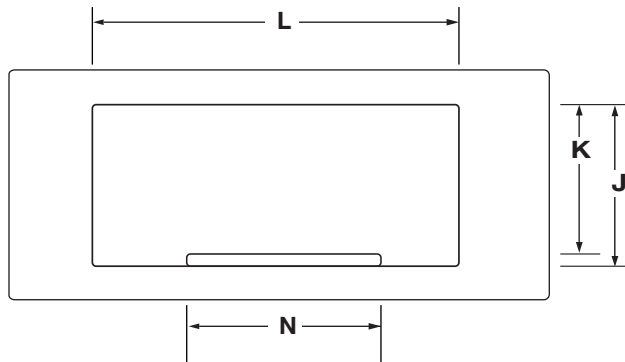

CAVITY INTERIOR FRONT VIEW

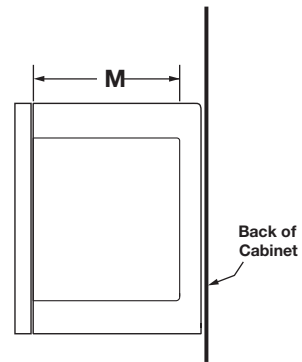


CAVITY INTERIOR SIDE VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.



## OPENING/CLEARANCE DIMENSIONS

MODEL #	WML35011K	
Opening/Clearance Measurement	in	cm
Width of cabinet opening (min.) (A)	30	76.2
Typical height from cooking surface to floor based on 36" countertops (B)	36	91.4
Typical height from top of cabinet to cooking surface based on 36" countertops (C)	24	61
Minimum height from floor to top of cabinet opening (B + C = D). (D)	60	152.4
Recommended electrical connection location (E)	See below schematic	

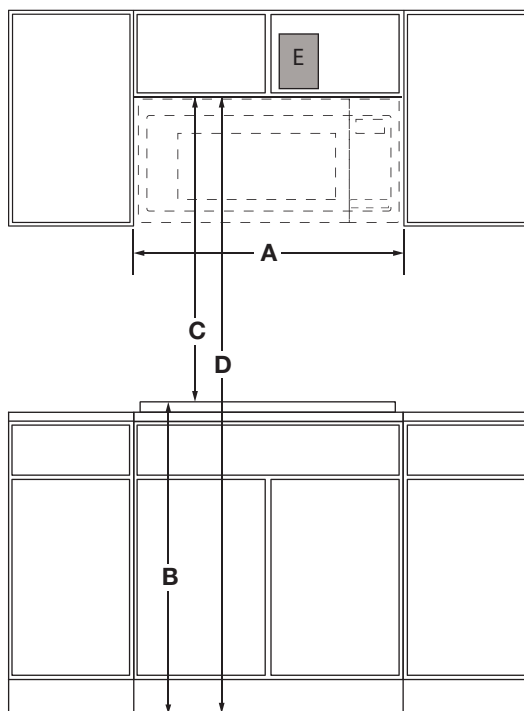

FRONT VIEW

### ELECTRICAL REQUIREMENTS

120 V, 60 Hz, AC only, 15 A or 20 A fused, electrical supply. is required. A time-delay fuse or dedicated circuit is recommended. Do not use an extension cord.

### LOCATION REQUIREMENTS

Support structure must be able to support 150 lb (68 kg) including microwave oven and upper cabinet including contents.

Mounting plate must attach to a minimum of one 2" x 4" (5.1 cm x 10.2 cm) wall stud.

Mounting distance between a fixed wall on the hinged-side of the door and the microwave oven is 1/2" (1.27 cm)

### VENTING REQUIREMENTS

The microwave oven is factory set for recirculating ventilation. To vent through the roof or wall, refer to installation instructions for further information.





**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

# DIMENSIONS

## OPENING/CLEARANCE DIMENSIONS

MODEL #	WML35011K	
Unit of Measurement	in	cm
Depth of upper cabinet (min.-max.)* (F)	12~15	30.5~38.1
Can this product be installed flush? Flush refers to the appliance not protruding past the cabinet depth. (Y/N)	N	

\* This microwave oven is factory set for 12" ~ 14" depth of upper cabinet, installed with the provided mounting plate. For 15" depth of upper cabinet, installed with the optional bump out mounting kit W11185746, the bumped out mounting kit is not provided, but can be purchased from Whirlpool.

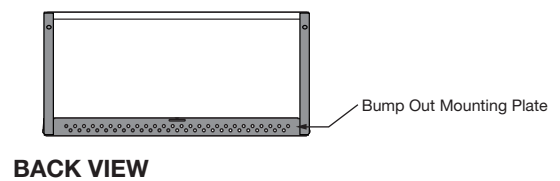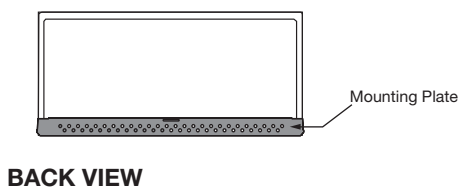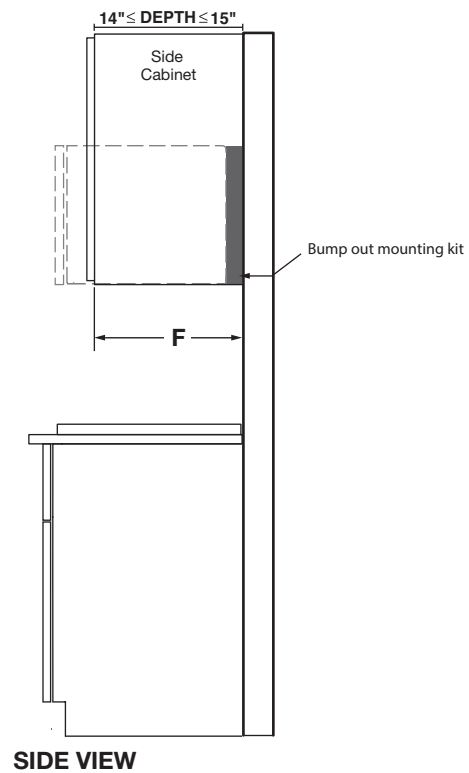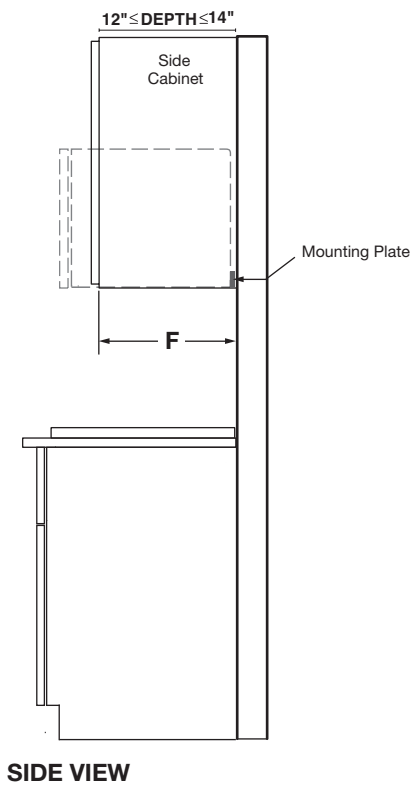

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

