

MICROWAVE OVEN


PRODUCT DIMENSIONS					
MODEL #	WMH78519L/YWMH78519L				
Unit of Measurement	in	cm			
Overall Width (A)	30	76			
Overall Width with handle (A1)	30 ³ / ₁₆	76.6			
Overall Height (B)	17.1	40.5			
Height of the door (C)	17.1	43.5			
Depth without door (D)	14 ³ / ₄	37.5			
Depth with door (E)	17 ⁵ / ₁₆	44			
Depth with door open 90° (F)	45	114.3			
Depth with Bump Out Kit (G)	17 ⁷ /8	45.35			



FRONT VIEW



TOP VIEW

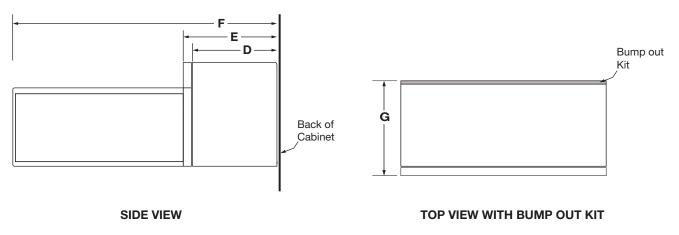





MICROWAVE OVEN

MICROWAVE INTERIOR CAVITY DIMENSIONS

MODEL #	WMH78519L/YWMH78519L	
Unit of Measurement	in	cm
Cavity Height (J)	10	25.5
Cavity Height Including Heighest Point of the Turntable (K)	9 ⁷ / ₁₆	24
Cavity Width (L)	21.1	53.5
Cavity Depth (M)	14	35.5
Turntable Diameter (N)	1 4 ³ / ₁₆	36



CAVITY INTERIOR FRONT VIEW



CAVITY INTERIOR SIDE VIEW




MICROWAVE OVEN

OPENING/CLEARANCE DIMENSIONS


MODEL #	WMH78519L/YWMH78519L	
Unit of Measurement	in	cm
Width of cabinet opening (minimum) (A)	30	76.2
Typical height from cooking surface to floor based on 36" (91.4 cm) countertops. (B)	36	91.4
Typical height from top of cabinet to cooking surface based on 36" (91.4 cm) countertops. (C)	30	76.2
Minimum height from floor to top of cabinet opening. $(B + C = D)$. (D)	66	167.6
Recommended electrical connection location. (E)	See below schematic	

ELECTRICAL REQUIREMENTS

120 V, 60 Hz, AC only, 15 A or 20 A fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Do not use an extension cord.

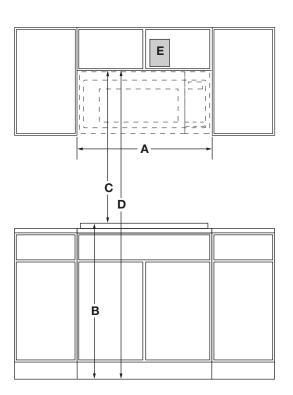

FRONT VIEW



LOCATION REQUIREMENTS

Support structure must be able to support 150 lb (68 kg) including microwave oven and upper cabinet including contents. Mounting plate must attach to a minimum of one $2" \times 4"$ (5.1 cm x 10.2 cm) wall stud. Mounting distance between a fixed wall on the higed-side of the door and the microwave oven is 5" (12.7 cm).

VENTING REQUIREMENTS

The microwave oven is factory set for recirculating ventilation. To vent through the roof or wall, refer to installation instructions for further information.



MICROWAVE OVEN

OPENING/CLEARANCE DIMENSIONS

MODEL #	WMH78519L/YWMH78519L	
Opening/Clearance Measurement	in	cm
Depth of upper cabinet (minimum-maximum)* (F)	12~15	30.5~38.1
Can this product be installed flush? Flush refers to thre appliance not protruding past the cabinet depth. (Y/N)	Ν	

*This microwave oven is factory set for 12" (30.5 cm)~14" (35.56 cm) depth of upper cabinet, install with the provided mouting plate. For 15" (38.1 cm) depth of upper cabinet, install with the optional bump out mounting kit W11185746, the bumpt out mounting kit is not provided, but can purchased from Whirlpool.

