
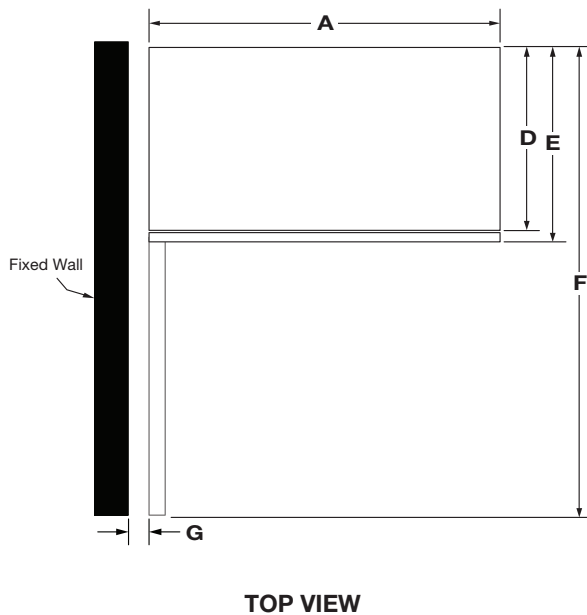


# DIMENSIONS

## BUILT-IN MICROWAVES WITH TRIM KITS

### PRODUCT DIMENSIONS


MODEL #	SLIM TRIM KIT MODELS WMT50011K / KMBT5011K		STANDARD TRIM KIT MODELS WMT55511K / KMBT5511K	
	in	cm	in	cm
Unit of Measurement				
Overall width of microwave (A)	27 <sup>13</sup> / <sub>16</sub>	70.7	27 <sup>13</sup> / <sub>16</sub>	70.7
Overall height of microwave (B)	10 <sup>5</sup> / <sub>16</sub>	26.2	10 <sup>5</sup> / <sub>16</sub>	26.2
Height of the door (C)	10 <sup>5</sup> / <sub>16</sub>	26.2	10 <sup>5</sup> / <sub>16</sub>	26.2
Depth without door (D)	16 <sup>3</sup> / <sub>8</sub>	41.6	16 <sup>3</sup> / <sub>8</sub>	41.6
Depth with door (E)	18	45.7	18	45.7
Depth with door open 90° (F)	42 <sup>1</sup> / <sub>8</sub>	107	42 <sup>1</sup> / <sub>8</sub>	107
Distance from fixed wall to door open 90° (G)	1/2	1.3	1/2	1.3

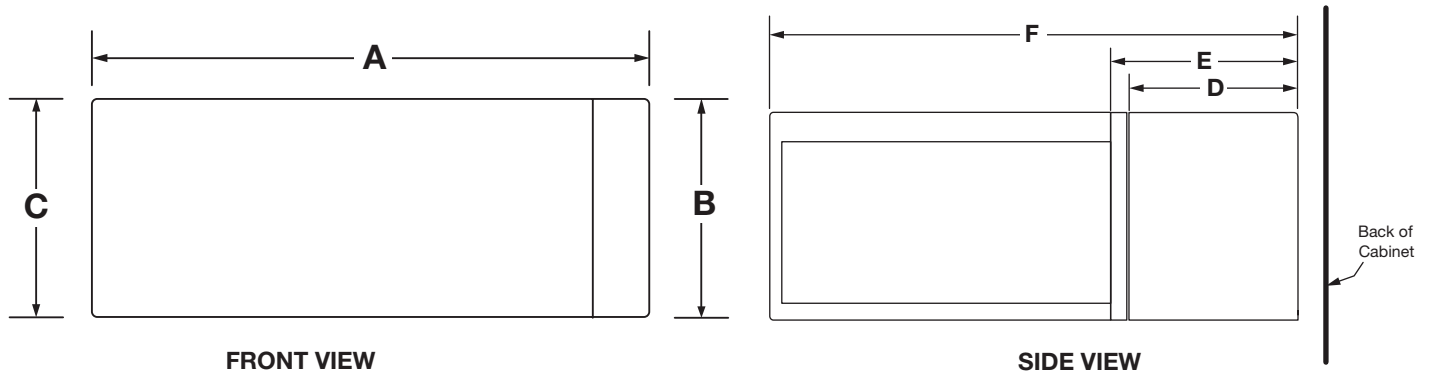


**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

## TRIM KIT FRAME DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS WMT50011K / KMBT5011K		STANDARD TRIM KIT MODELS WMT55511K / KMBT5511K	
	in	cm	in	cm
Overall width of trim kit frame (H)	29 <sup>3</sup> / <sub>4</sub>	75.6	29 <sup>3</sup> / <sub>4</sub>	75.6
Overall height of trim kit frame (J)	14	35.6	19 <sup>1</sup> / <sub>8</sub>	48.6
Trim kit frame inner opening height (K)	10 <sup>9</sup> / <sub>16</sub>	26.9	10 <sup>9</sup> / <sub>16</sub>	26.9
Width of trim kit inner opening (L)	28	71.1	28	71.1
Depth of trim kit frame (M)	2 <sup>5</sup> / <sub>16</sub>	5.8	2 <sup>5</sup> / <sub>16</sub>	5.8
Trim kit frame thickness (visible) (N)	7/8	2.2	7/8	2.2

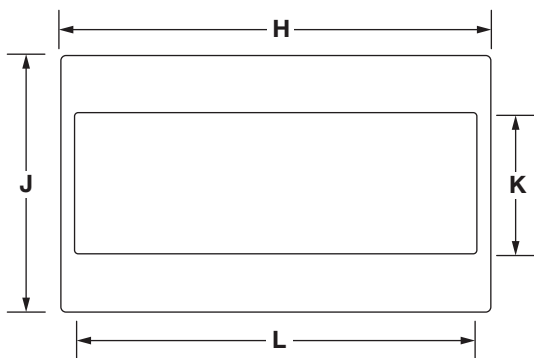

**FRONT VIEW**

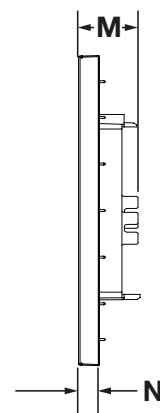

**SIDE VIEW**


**IMPORTANT:** Dimensional specifications are provided for planning purposes only.

**Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.


# DIMENSIONS

## DIMENSION AS INSTALLED


MODEL #	SLIM TRIM KIT MODELS WMT50011K / KMBT5011K		STANDARD TRIM KIT MODELS WMT55511K / KMBT5511K	
	in	cm	in	cm
Opening/Clearance Measurement				
Height of the door (A)	10 <sup>5</sup> / <sub>16</sub>	26.2	10 <sup>5</sup> / <sub>16</sub>	26.2
Overall height of trim kit frame (B)	14	35.6	19 <sup>1</sup> / <sub>8</sub>	48.6
Overall height of microwave (C)	10 <sup>5</sup> / <sub>16</sub>	26.2	10 <sup>5</sup> / <sub>16</sub>	26.2
Overall height with rail (D)	11 <sup>3</sup> / <sub>16</sub>	28.3	11 <sup>3</sup> / <sub>16</sub>	28.3
Depth with door (E)	18	45.7	18	45.7
Depth with door open 90° (F)	42 <sup>1</sup> / <sub>8</sub>	93.7	42 <sup>1</sup> / <sub>8</sub>	93.7
Trim kit frame overhang-upper frame (G)	1	2.6	1	2.6
Trim kit frame overhang-lower frame (H)	1	2.6	1	2.6
Overall width of trim kit frame (J)	29 <sup>3</sup> / <sub>4</sub>	75.6	29 <sup>3</sup> / <sub>4</sub>	75.6
Overall height of microwave (K)	10 <sup>5</sup> / <sub>16</sub>	26.2	10 <sup>5</sup> / <sub>16</sub>	26.2
Overall height of trim kit frame (L)	14	35.6	19 <sup>1</sup> / <sub>8</sub>	48.6
Trim kit frame overhang-left frame (M)	5/8	1.6	5/8	1.6
Trim kit frame overhang-right frame (N)	5/8	1.6	5/8	1.6
Distance from fixed wall to door open 90° (P)	1/2	1.3	1/2	1.3

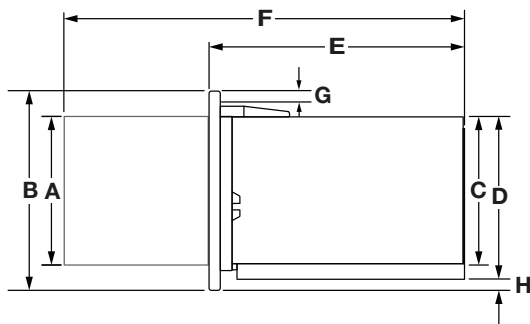

SIDE VIEW

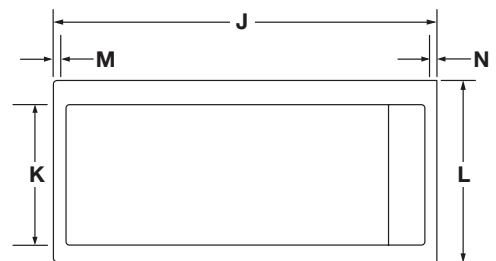

FRONT VIEW

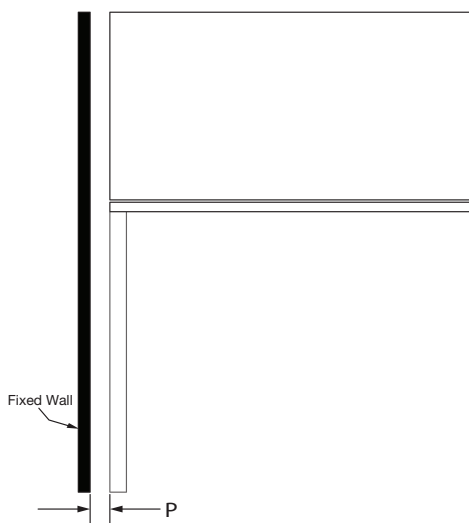

TOP VIEW


**IMPORTANT:** Dimensional specifications are provided for planning purposes only.

**Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.


# DIMENSIONS

## MICROWAVE INTERIOR CAVITY DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS WMT50011K / KMBT5011K		STANDARD TRIM KIT MODELS WMT55511K / KMBT5511K	
	in	cm	in	cm
Unit of Measurement				
Cavity Height (J)	7	17.7	7	17.7
Cavity Height from the Highest Point of the Turntable (K)	6 <sup>7</sup> / <sub>8</sub>	17.5	6 <sup>7</sup> / <sub>8</sub>	17.5
Cavity Width (L)	18 <sup>7</sup> / <sub>8</sub>	48	18 <sup>7</sup> / <sub>8</sub>	48
Cavity Depth (M)	14	35.6	14	35.6
Turntable Diameter (N)	12	30.5	12	30.5

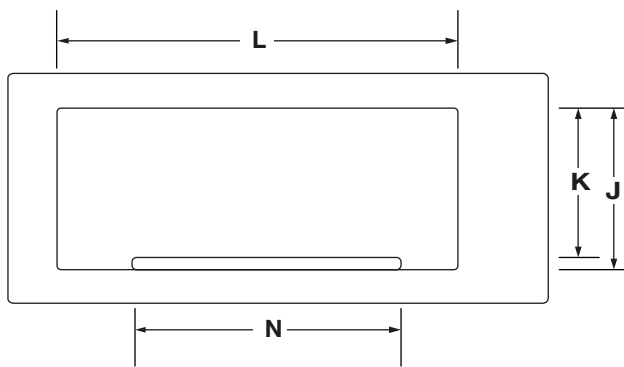

FRONT VIEW

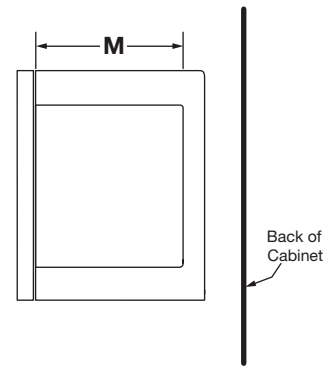


SIDE VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

## OPENING/CLEARANCE DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS WMT50011K / KMBT5011K		STANDARD TRIM KIT MODELS WMT55511K / KMBT5511K	
	in	cm	in	cm
Unit of Measurement				
Width of cabinet opening (min.)* (A)	30	76.2	30	76.2
Width of cutout (B)	28½	72.4	28½	72.4
Height of cutout (C)	12	30.5	17⅛	43.5
Top of cutout to bottom of upper cabinet door (min.) (D)	2	5.1	2	5.1
Bottom of cutout to top of lower cabinet door (min.) (E)	1 <sup>9</sup> / <sub>16</sub>	4	1 <sup>9</sup> / <sub>16</sub>	4
Depth of cutout (min.) (F)	21¾	55.2	21¾	55.2
Bottom of cutout to floor (min.) (G)	36	91.4	36	91.4
Back of the microwave oven to the surface of junction box (H)	4" (10.2 cm) < H < 40" (102 cm)			
Recommended junction box location (e)	Upper right quadrant			
Can this product be installed flush? Flush refers to the appliance not protruding past the cabinet depth. (Y/N) (J)	N			

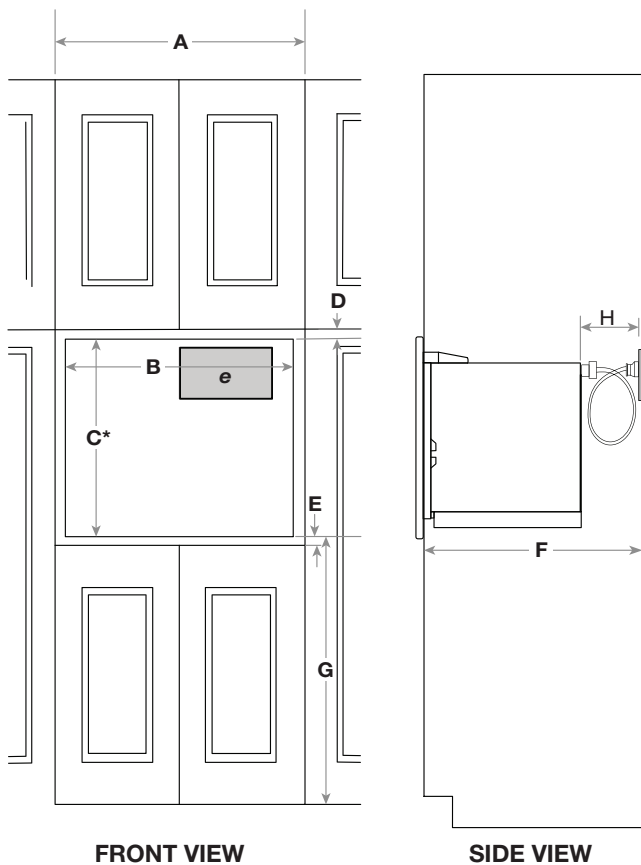


### ELECTRICAL REQUIREMENTS

120 V, 60 Hz, AC only, 15 or 20 A fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Use a grounded 3 prong outlet. Do not use an extension cord.

### LOCATION REQUIREMENTS

- This is a built-in appliance. Do not use as countertop microwave oven.
- Minimum of 36" from the floor to cut-out floor.
- Complete enclosure around the recessed portion of the microwave oven.
- This microwave oven must be installed into a wood cabinetry. The location must provide:
  1. Cutout opening that is plumb and square.
  2. Cutout floor that is solid, level and flush with bottom of cabinet cutout.
  3. Support for weight of at least 150 lbs (68 kg), which includes microwave oven and items placed inside.



**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.