

SIMU536B





Product family Cooktop

Installation Ultra-low profile

36" **Dimensions** Electric Power supply Type Induction

8017709207281 EAN code



Aesthetic





Aesthetics Universal Color Black Glass **Finishing** Material Glass Glass Ceramic Glass edge Beveled Touch controls Control setting type

Slider Yes Controls position Front Silkscreen color Gray

Programs / Functions



Cooking zones 5 Cooking zones with Booster 5 No. of Flexible zones 2 Main on/off switch Yes Power levels 9 Cooking zones 5

Options



















Flexible zone Bridge End-of-cooking acoustic Yes alarm

Simmer Yes Residual time indicator Yes Automatic simmer Yes Child safety lock Yes End cooking timer 5 Twin-zone option Yes Pause option Yes Quick level selection Yes

Technical Features

STOP °C∓





Front-left - Induction - single - 1.85 kW - Booster 2.50 kW - Ø 18.0 cm

Rear-left - Induction - single - 1.85 kW - Booster 2.50 kW - Ø 18.0 cm

Center - Induction - single - 2.80 kW - Booster 5.40 kW - Ø 30.0 cm

Rear-right - Induction - single - 1.85 kW - Booster 2.50 kW - Ø 18.0 cm

Front-right - Induction - single - 1.85 kW - Booster 2.50 kW - Ø 18.0 cm

120/208 V

Automatic pan diameter Yes

adjustment

Automatic pot detection Yes Minimum pan diameter Yes

indication

Voltage

Automatic switch-off in Yes

case of over-heating

Automatic switch-off in Yes

case of overflow


Residual heat indicator Yes
Protection from Yes

accidental start

Electrical Connection

Nominal power 11100 W Voltage 2 (V) 120/240 V Current 46 A Frequency 60 Hz



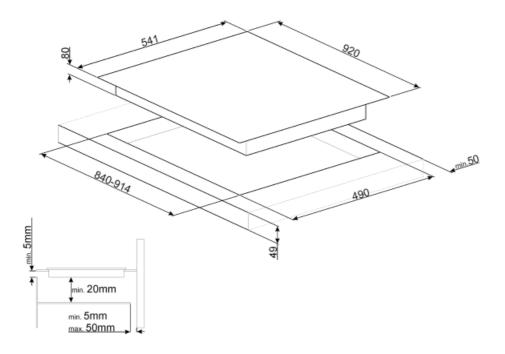



Not included accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary (TT)



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Melting function, suitable for slowly melting delicate foods such as chocolate or butter.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Simmering function: ideal for long-cooking recipes, preventing food from boiling over or sticking to the pan.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



TWIN_ZONE_72dpi