




## Dimension Guide

### Whirlpool® Top Load Washer

WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW



---

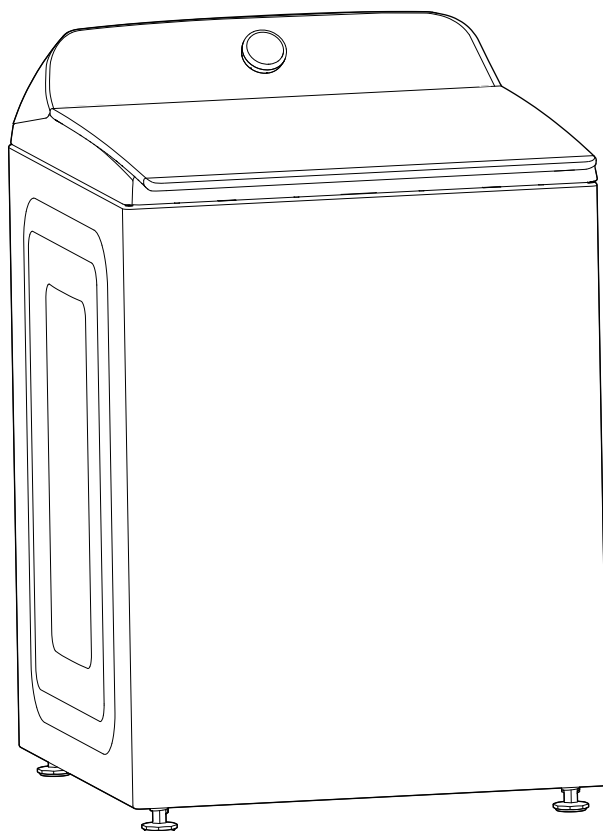

## DETAILED PLANNING DIMENSIONS



**WARNING:** To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.

| Electrical Requirements   |               |
|---|---------------|
| WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW - 5.3 cu ft DOE (US), 6.1 cu ft IEC (CAN) |               |
| Minimum Circuit Amperage Rating   | 15 A          |
| Operating Voltage   | 120 V AC only |
| Operating Frequency   | 60 Hz         |

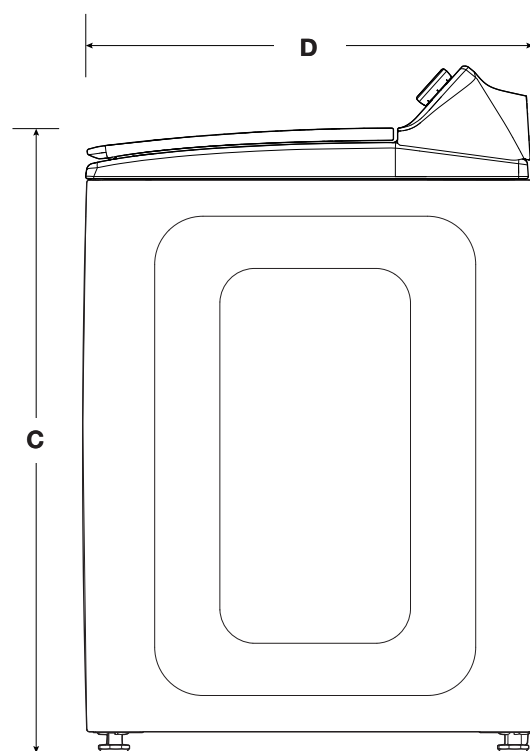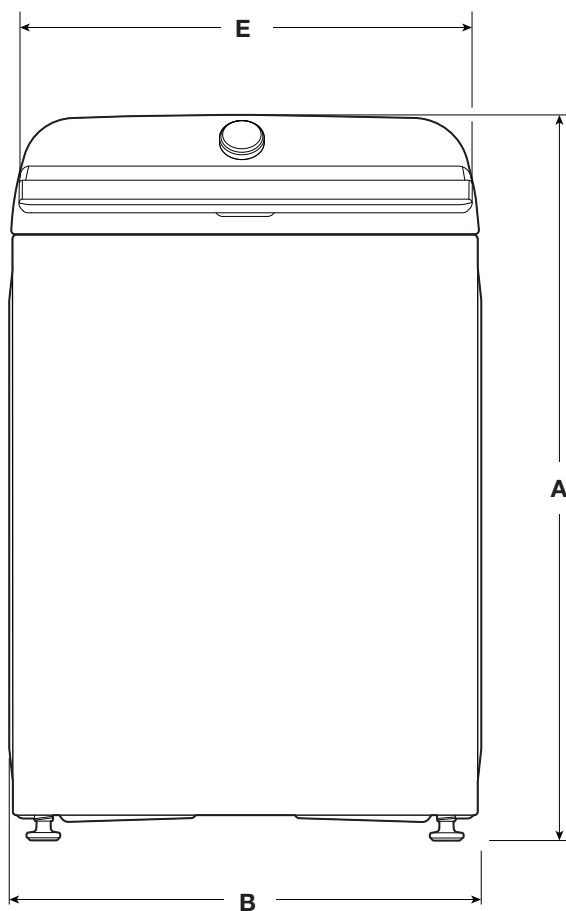

| Product Dimensions                                    |                               |                                |              |                                |              |
|---|-------------------------------|--------------------------------|--------------|--------------------------------|--------------|
| WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW |                               |                                |              |                                |              |
|   |                               | in (minimum)                   | mm (minimum) | in (maximum)                   | mm (maximum) |
| A   | Height (with feet)            | 41 <sup>7</sup> / <sub>8</sub> | 1064         | 42 <sup>3</sup> / <sub>4</sub> | 1086         |
| B   | Width                         | 27 <sup>3</sup> / <sub>8</sub> | 695          | -                              | -            |
| C   | Top of Lid Height (with feet) | 37 <sup>1</sup> / <sub>4</sub> | 946          | -                              | -            |
| D   | Depth                         | 28                             | 711          | 28 <sup>3</sup> / <sub>4</sub> | 730          |
| E   | Width of Lid                  | 26 <sup>3</sup> / <sub>8</sub> | 670          | -                              | -            |

## DETAILED PLANNING DIMENSIONS

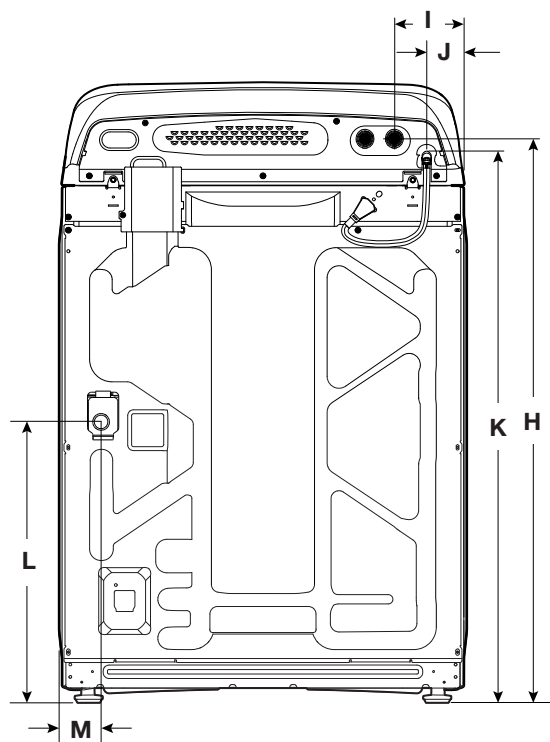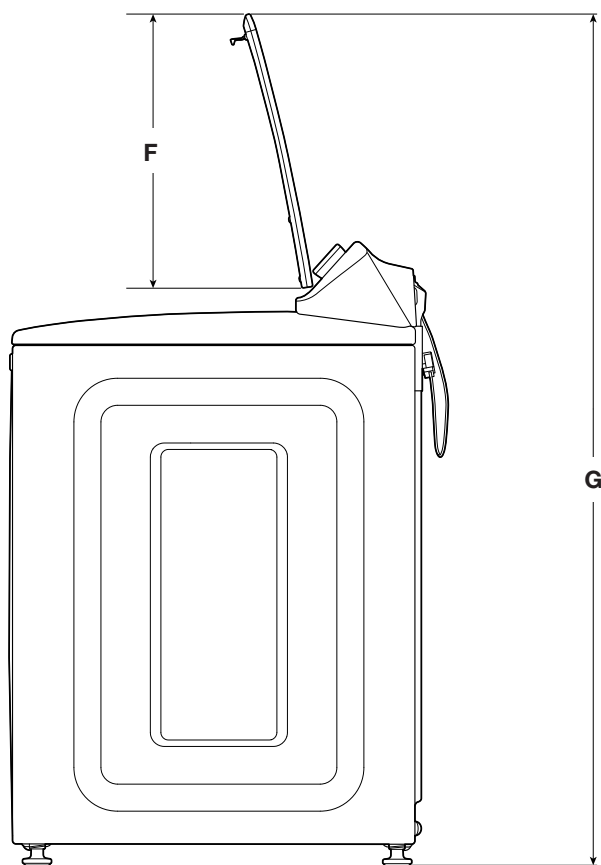


### Product Dimensions

WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW

|   |                              | in (minimum) | mm (minimum) | in (maximum) | mm (maximum) |
|---|------------------------------|--------------|--------------|--------------|--------------|
| F | Height of Lid                | 18½          | 470          | -            | -            |
| G | Height with Lid Open         | 57¼          | 1454         | 58½          | 1476         |
| H | Water Inlet Valves Height    | 38¼          | 972          | 39½          | 994          |
| I | Water Inlet Valves from Side | 4⅞           | 124          | -            | -            |
| J | Power Cord from Side         | 9⅝           | 244          | -            | -            |
| K | Power Cord Height            | 38           | 965          | 38¾          | 984          |
|   | Power Cord Length            | 62           | 1575         | -            | -            |
| L | Drain Hose Outlet Height     | 19¼          | 489          | 20⅞          | 511          |
| M | Drain Hose Outlet from Side  | 2⅞           | 73           | -            | -            |
|   | Drain Hose Length            | 42           | 1067         | -            | -            |
|   | Diameter of Drain Hose       | 1            | 25           | -            | -            |

## DETAILED PLANNING DIMENSIONS

### Minimum closet clearances

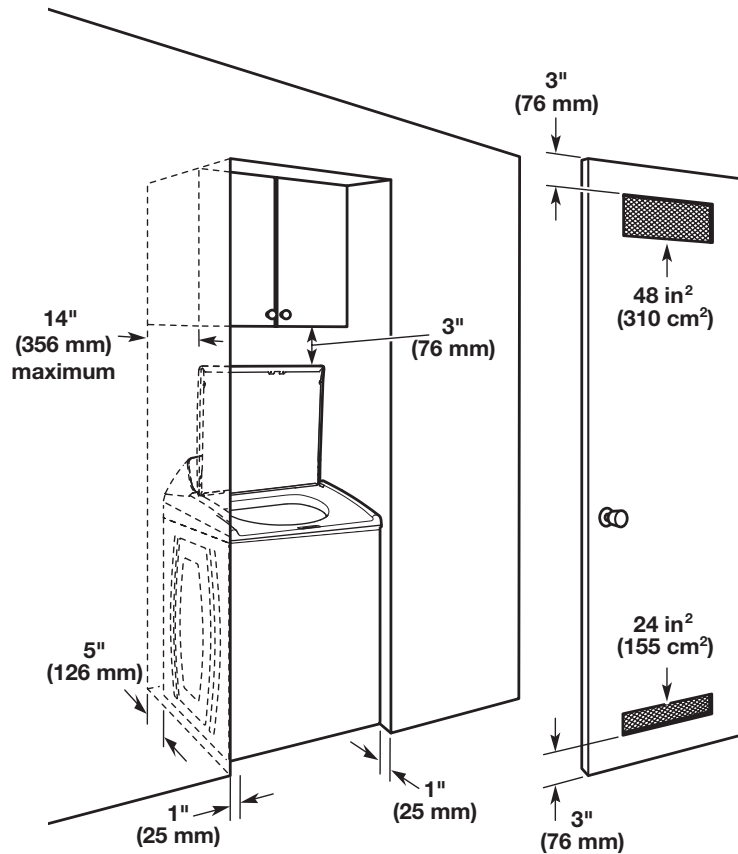

Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.