

AKD4807LP

48" Culinary Series Professional Gas Range & Electrical Dual Fuel Range

- Versatile German designed tower burners (high power or low simmer)
- Large 7.2-cu. ft. capacity convection oven with blue porcelain interior
- Durable, high-grade LED illuminated knobs
- Heavy-duty continuous grates and griddle
- Equipped with adjustable, full-extention glide racks

Oven Properties and Features 2.7-cu. ft. (small)/4.5-cu. ft. (large) **Oven Capacity** Cooking Modes (Large) Bake, Convection, Broil Cooking Modes (Small) Bake CleaningType Manual **Oven Bake Incoloy Element** 1,500W (Small) / 2,800W (Large) **Bake Power** 2,400W (Small) / 3,500W (Large) **Broiler Power** Adjustable Full Extension Glide Racks 2 Interior Material **Blue Porcelain** Convection True European **Cooktop Properties and Features Cooking Grates** Cast Iron, Continuous Total Number of Sealed Burners 6 Dual Power **Drip Pan Black Porcelain** Knobs Stainless Steel, LED 18,000 BTU/650 BTU Front Left Burner Power Front Center Burner Power 9,000 BTU/650 BTU Front Right Burner Power 18,000 BTU/650 BTU **Rear Left Burner Power** 9,000 BTU/650 BTU Rear Center Burner Power 18,000 BTU/650 BTU **Rear Right Burner Power** 9,000 BTU/650 BTU **Griddle Burner Power** 18,000 BTU Additional Information Warranty 2 Year, Parts & Labor Included Accessories **Broiler Pan** Available Accessories Additional Racks / Broiler Pans





Continuous Grates maximize cooking surface



Premium LED lit metal knobs



Large Capacity Oven with Blue Interior



Incoloy Element




Ultra Low Simmer and High Power Dual Burners

*LP BTU may be slightly different



Overall Dimensions

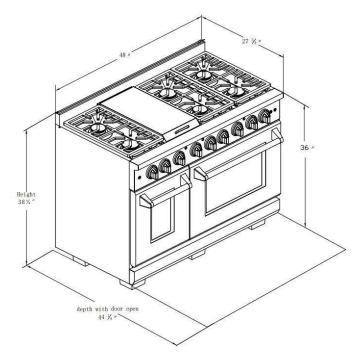

Technical Details	
Overall Dimensions	28"D x 48"W x 39"H
Adjustable Range Height	7/8"
Net Weight	529 lbs.
Backguard Height	2.5"
Amps/Volts/Freq	50A/240V/60Hz
Plug Type	4 Prong
Gas Type	Liquid Propane (27.5 mbar)

Hood Install Guides

E

WALL INSTALLATION

Area allows for flush installation with Hook UpRequirements through-the-wall connection of pipe stub/shut-off valve and rear wall 240V outlet. 2 30" (762mm) mln 36" (914mm)max Δ TRIST 66"-72" 10 1/2" (1676mm) (1829mm) 36″ 914mm Shortest connection from Area allows for flush installation with through-the-floor connection of pipe stub/shut-off valve 日

hard pipe stub locationto range hook-up