- Volume of 5.1 cubic feet, holds 8 standard wine bottles and (147) 12 oz cans or (79) 12 oz bottles
- Signature SAPPHIRE blue interior
- Full wrapped stainless-steel exterior
- Articulating, concealed self-closing hinges with built-in door stop
- Low e, argon gas-filled triple-paned tempered glass door with uv coating
- Multifunction capacitative touch electronic control
- Temperature range: 34 °F to 65 °F
- Fan-assisted cooling system allows for even temperatures, quicker cooldown times, and added efficiency
- Full-length flush LED theater lighting can be set to display your collection for 4 or 6 hours or schedule nightlight feature
- Adaptable racking system includes 3 stainless front, full-extension racks with 2 tempered glass shelf inserts and 1 gray wine rack insert. Optional shelf inserts include gray wine rack inserts and/or chrome-plated wire shelf inserts making it easy to adapt to food and beverage storage needs
- Clear bottom crisper drawer
- Unit ships right hinged with field-reversible doors
- Stainless model includes 1" diameter stainless steel handle with faceted standoffs (26" length)
- Panel ready model requires 3/4" custom door panel and handle
- Precise zero clearance design allows for unmatched integration into any built-in setting
- 4 Independent adaptable leveling legs
- Adaptable grille accepts an integrated toe kick and allows front/back and up/down alignment with adjacent cabinetry and toe kick/plinth
- Automatic defrost
- Lock standard on stainless model

Stainless with Lock

Panel Ready

Model Details

Model	Lock	Finish	Description	Shipping Weight
SBCR24SS	Yes	Stainless Steel	24" Beverage Center, Factory Installed Lock	180 lbs
SBCR24PR	No	Panel Ready	24" Beverage Center	172 lbs

Dimensions/Weight	Detail
Product Depth	23 ¼"
Product Height	34" – 35"
Product Width	23 ⅞"
Product Weight	149 lbs
Product Volume	5.1 cu ft
Shipping Dimensions	26 ¾" x 27 ½" x 36 ¾"
Shipping Weight	180 lbs

Integration/Panel Information*	Detail
Panel Height	30" – 31"
Panel Thickness	¾"
Panel Width	23 ⅝"
Maximum Panel Weight	25 lbs

*Refer to manual for all panel and installation instructions

Indoor | 24" Beverage Center

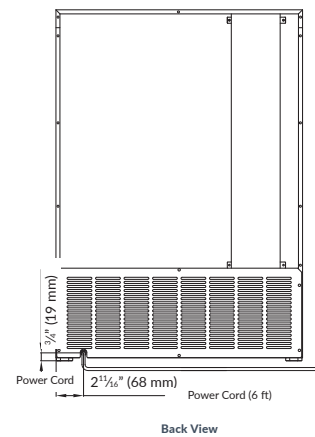| Model	Details
Control Type	Electronic Capacitative Touch with OLED Screen
Indoor or Outdoor	Indoor
Built-in Installation	Inset, Frameless / Overlay and Framed Cabinet Styles
Refrigerant Type	R600a

Electrical	Details
Electrical Requirements	115 V / 60 Hz
Volt Range	104 V ~ 127 V
Electrical Service	15 amp
Running Amps	0.7 amps

Approvals – Certifications	Details
ETL Residential / Commercial	Yes
ETL Sanitation	Yes
Star K	Yes

Capacities	Details
Maximum Shelf Weight	75 lbs
12 oz Can Capacity	147 Cans (Max)
12 oz Bottle Capacity	79 Bottles (Max)

Recommended location for electrical connection is in adjacent cabinet

34" (864 mm) to 35" (889 mm)

24" (610 mm)

11" (280 mm)

7" (177 mm)

Electrical hook-up location

24" (610 mm)

23⅞" (606 mm)

34" to 35" (864 to 889 mm)

Front View

23¼" (590 mm)*

20¹¹⁄₁₆" (526 mm)

34" to 35" (864 to 889 mm)

30" (762 mm)

18⅝" (472 mm)

Left View
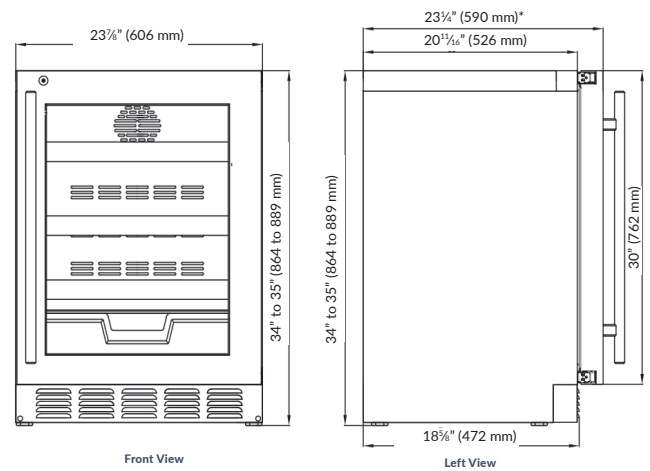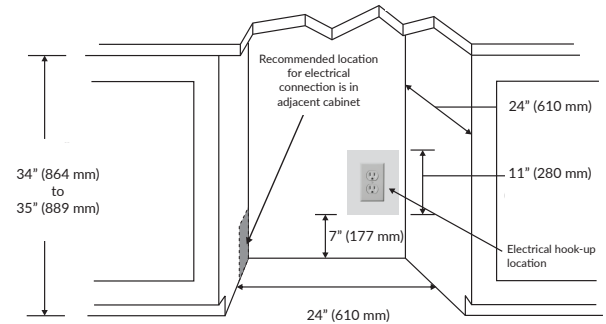
*Dimensions are the same for Panel Ready unit when ¾" panel applied

¾" (19 mm)

Power Cord

2¹¹⁄₁₆" (68 mm)

Power Cord (6 ft)

Back View

All specifications are subject to change without notice.