


#### INDUCTION COOKTOP

#### PRODUCT DIMENSIONS


MODEL #	24" (65 cm) Cooktop WCI55US4JB/UCIG245KBL		30" (78.2 cm) Cooktop WCI55US0JB/WCI55US0JS		
Unit of Measurement	in	cm	in	cm	
Overall Width with Frame (A)	NA	NA	303/4	78.2	
Depth with Frame (B)	NA	NA	22	55.9	
Overall Width without Frame (C)	255/8	65	303/4	78.2	
Depth without Frame (D)	<b>21</b> <sup>1</sup> / <sub>4</sub>	54.1	<b>21</b> <sup>1</sup> / <sub>4</sub>	54.1	

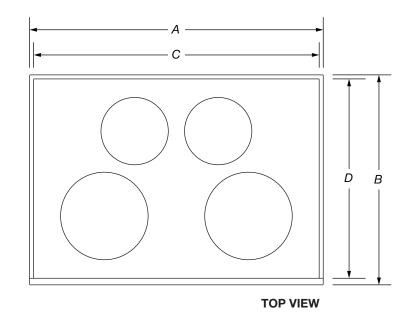


### pool Whj

# DIMENSIONS INDUCTION COOKTOP

MODEL #	24" (65 cm) C WCI55US4JB/U0		30" (78.2 cm) Cooktop WCI55US0JB/WCI55US0JS		
Unit of Measurement	in	cm	in	cm	
Glass Width (E)	25 <sup>19</sup> / <sub>32</sub>	65	3035/32	78.2	
Electric Inlet to Surface (F)	3 <sup>29</sup> / <sub>32</sub>	9.9	329/32	9.9	
Center to Electric Inlet (G)	9 <sup>11</sup> / <sub>32</sub>	23.7	13 <sup>3</sup> / <sub>32</sub>	33.2	
Recessed Cooktop Width (H)	21 <sup>21</sup> / <sub>32</sub>	55	29 <sup>11</sup> / <sub>32</sub>	74.5	





**FRONT VIEW** 

**BACK VIEW** 


# Whirlpool®

### DIMENSIONS

#### **INDUCTION COOKTOP**

#### PRODUCT DIMENSIONS

MODEL #	24" (65 cm) Cooktop WCI55US4JB/UCIG245KBL			m) Cooktop 3/WCI55US0JS
<b>Opening/Clearance Measurement</b>	in	cm	in	cm
Control Panel Height (I)	2 <sup>25</sup> / <sub>32</sub>	7.1	2 <sup>5</sup> / <sub>16</sub>	7.1
Recessed Cooktop Height (J)	<b>3</b> <sup>9</sup> / <sub>16</sub>	9	39/16	9
Cooking Surface Height (K)	3 <sup>23</sup> / <sub>32</sub>	9.4	323/32	9.4
Recessed Cooktop Depth (L)	201/4	51.4	201/4	51.4
Depth with Front Edge without Frame (M)	211/4	54.1	211/4	54.1
Depth with Front Edge with Frame (M)	NA	NA	22	55.9

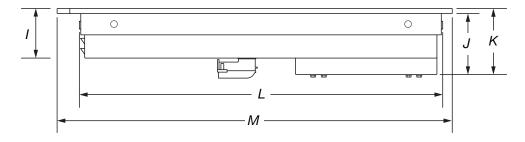

SIDE VIEW

### DIMENSIONS




#### INDUCTION COOKTOP

OPENING/CLEARANCE DIMENSIONS

MODEL #		n) Cooktop 3/UCIG245KBL	30" (78.2 cm) Cooktop WCI55US0JB/WCI55US0JS	
Unit of Measurement	in	cm	in	cm
Combustible Area above Cooking Surface Width (min.) (A)	24	60.9	30	76.2
Bottom of Cabinet Height above Cooking Surface (min.) (B)*	30	76.2	30	76.2
Bottom of Cabinet Height above Countertop (min.) (C)	18	45.7	18	45.7
Distance to Fixed Wall or Combustible Material (D)	1	2.5	1	2.5

\*If installing a hood above the cooktop, follow the hood instructions for dimensional clearances above the cooking surface.

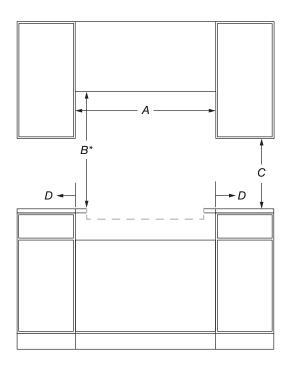

**FRONT VIEW** 

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved. 4 of 21

#### DIMENSIONS



5 of 21


#### INDUCTION COOKTOP

OPENING/CLEARANCE DIMENSIONS

MODEL #		n) Cooktop 3/UCIG245KBL	30" (78.2 cm) Cooktop WCI55US0JB/WCI55US0JS	
Unit of Measurement	in	cm	in	cm
Recommended Upper Cabinet Depth (E)	13	33	13	33
Cutout to Wall Depth (if backwall is constructed of non-combustible material) (F)*	1	2.5	1	2.5
Cutout to Wall Depth (if backwall is constructed of combustible material) (F)*	1	2.5	1	2.5
Cabinet to Countertop Height (G)**	3 <sup>15</sup> / <sub>16</sub>	10	3 <sup>15</sup> / <sub>16</sub>	10
Cabinet Depth (H)	<b>23</b> <sup>9</sup> / <sub>32</sub>	59.1	23 <sup>9</sup> / <sub>32</sub>	59.1

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7<sup>3</sup>/4" (19.7 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

\*\*The bottom of the cutout supports the product. Unlike many cooktops, these models do not hang from the side flanges, but rather sit on the floor of the cutout.

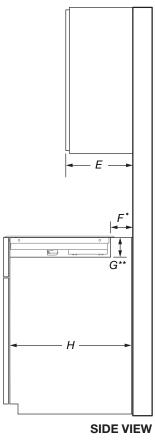

# Whirlpool®


## DIMENSIONS

#### INDUCTION COOKTOP

OPENING/CLEARANCE DIMENSIONS

MODEL #	24" (65 cm) Cooktop WCI55US4JB/UCIG245KBL		30" (78.2 cm) Cooktop WCI55US0JB/WCI55US0JS	
Unit of Measurement	in	cm	in	cm
Countertop and Cabinet Cutout Width (I)	21 <sup>29</sup> / <sub>32</sub>	55.6	<b>29</b> <sup>9</sup> / <sub>16</sub>	75.1
Countertop and Cutout Depth (J)	20 11/32	51.7	20 <sup>11</sup> / <sub>32</sub>	51.7

NOTE: Due to manufacturing factory tolerances, these are nominal dimensions. You may need to readjust to meet your clearance.



#### **DIMENSIONS**




#### INDUCTION COOKTOP

ELECTRICAL REQUIREMENTS

#### ELECTRIC REQUIREMENTS CHECKLIST

- □ A 240 V, 60 Hz, AC only, fused, electrical circuit is required.
- □ For 24" (65 cm) cooktops, use a 30 A circuit.
- □ For 30" (78.2 cm) cooktops, use a 30 A circuit.
- A dedicated circuit is recommended.

#### **RECOMMENDED ELECTRICAL OUTLET ZONE**

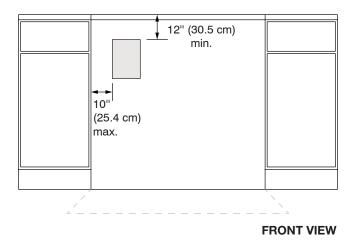

**NOTE:** If you have questions about your electrical supply, call a licensed, qualified electrician.